



MYSmart™ series MYC50™ in-line coating



High-productivity, high-precision
conformal coating systems

MYCRONIC

When passion meets innovation ●

Introducing the MYC50 platform

High-performance conformal coating systems

As electronics continually become embedded into an endless variety of products, the need for high-precision conformal coating is greater than ever before. Automate complex coating processes, monitor process parameters and switch spray patterns without interruption. The MYC50 gives you powerful, software-driven process flows that ensure years of productivity for even the most complex printed circuit boards.

1. Fast and stable operation.
2. Spray patterns can be changed on the fly, significantly improving process efficiency.
3. Flexible multi-axis control enables precise coating of complex PCBs.
4. Powerful process controls result in precise coating that consistently meet strict quality guidelines.
5. Bar code reader enables automatic program loading and traceability.



- Fast and stable operation
- Automated spray pattern changeovers
- Flexible multi-axis control for complex processes
- Powerful process controls for enhanced quality
- Barcode-defined program selection

The MYSmart series MYC50 in-line conformal coating platform combines high-accuracy edge control with advanced feedback systems. A wide range of process parameters can be monitored enabling quality output. Options such as fan width control, non-heated circulation systems, heated circulation systems and barcode readers are a few examples of process control enhancements that are possible. Wherever ruggedized electronics are required, the MYC50 helps to prevent material waste while ensuring highly controlled coating film thickness, coating area and process speed.

APPLICATIONS

- Consumer electronics
- Industrial electronics
- Household appliances
- Automotive electronic control panels
- Military electronics
- Computer control panels
- Agricultural equipment control panels
- Battery protection boards
- Led lighting
- Outdoor led displays
- Converter circuit boards
- Security control panels
- Motor control boards
- Power management devices

SMART COATING MADE SIMPLE

The MYC50 is built upon years of coating experience, condensing that knowledge into a robust, easy to use system. The result is a highly capable platform that's simple to program and operate, yet powerful enough to add increasing value to your in-line operations as volume, complexity and automation demands grow. Giving you more ways than ever before to handle tomorrow's production challenges.

Highly configurable for precise conformal coating results

The MYC50's high-precision platform, multi-angle rotation configuration and flexible software operation ensures perfect selective conformal coating output.




HIGH SPEED, HIGH PRECISION MOTION PLATFORM

- Robust design of frame structure and axis
- High precision ball screw and AC servo motor
- High speed operation with extreme precision

ANGLE AND ROTATE COATING CAPABILITIES

- Four-direction rotation
- Software controlled
- Modular design for easy installation and removal
- Suitable for V-5000 and V-420A

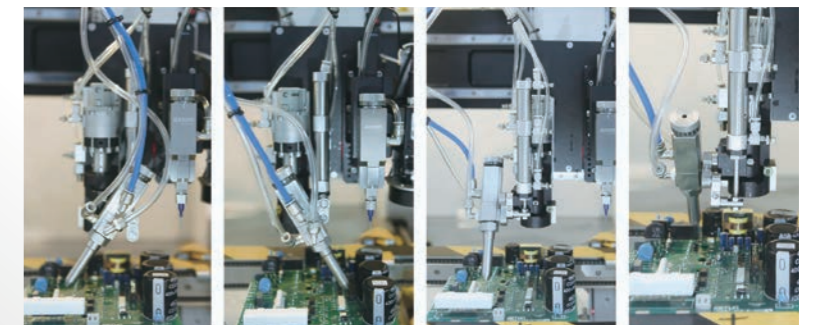

INTUITIVE SOFTWARE DESIGN

- Easy software to operate and learn
- Rich functionality to meet complex processes
- A variety of program input methods including camera teaching

Valve configurations for every application

The MYC50 series can be equipped with a variety of different valves; tri-mode spray valve, precision spray valve and film valve for different applications as well as combinations between them.



TRI-MODE VALVE V-5000

V-5000 is suitable for middle to low viscosity fluids. The three modes are line, swirl and spray. The V-5000 valve has high edge definition and good balance between efficiency and effect.

FEATURES AND ADVANTAGES

- Controlled film thickness at high speed
- Viscosity range: 500-10,000 CPS
- Optional 360 degree rotation structure
- Easy maintenance



NEEDLE VALVE V-420A

The V-420A needle valve is suitable for low-viscosity materials and mainly used in selective coating applications. Maximum dispensing speed is 100 dots/s. For tall component coating areas and very small tolerances of noncoating requirements, the best choice is V-420A configured with spray or film valve.

FEATURES AND ADVANTAGES

- Good sealing effect, especially for low viscosity materials
- Cost effective
- Simple structure and easy maintenance
- Flexible needle sizes and changeable needles
- Adjustable flow rate by parameter settings
- High precision dispensing accuracy



FILM VALVE V-5400

The V-5400 film coating valve is suitable for low viscosity fluids and solvent-based materials. A special nozzle structure enables the material to be applied in a non-atomized manner, with a utilization rate of up to 99%. Optional sizes of nozzles help achieve the best results of film width and thickness for your application.

FEATURES AND ADVANTAGES

- Non-atomizing mode reduces emissions
- Adjustable film width and high transfer efficiency
- High material utilization, reduced waste, and low cost
- Optional 90 degree rotation of film direction
- No masking required

MYC50 in-line specification

MOTION SYSTEM

X,Y AXIS	Z AXIS
X, Y speed: max 800 mm/s	Z axis speed: max. 300 mm/s
X, Y acceleration: max. (0.8 g peak with s-curves)	Z axis acceleration: max. (0.3 g peak with s-curves)
X, Y repeatability: ± 25 um, 3 σ	Z axis repeatability: ± 25 um, 3 σ
X, Y drive mode: servo motor, ball screw	Z axis drive mode: servo motor, ball screw

D AXIS

Rotation angle: ± 90 degrees	Valve rotation axis
Repeatability: ± 0.1 degree	Rotation angle: ± 30 degrees
Drive mode: cylinder	Repeatability: ± 0.1 degree

DISPENSING AREA

ONE WORK STATION	TWO WORK STATIONS
Single valve max: 650 × 450 mm	Single valve max: 450 × 450 mm
(V-5000 + V-420A) max : 560 × 450 mm	V-5000+V-420A max: 450 × 450 mm
V-5000 tilting module + V-420A max : 560 × 380 mm	V-5000 tilting module + V-420A max: 450 × 380 mm
	Max. clearance above and below PCB: 100 mm

BOARD HANDLING

Drive mode: stepper motor, stainless steel chain	Power: 220V, 2.5KW, 16A, 60 Hz
Payload capacity: 5 kg	Air supply: 80 psi (5.5 bar)
Min. board/carrier width: 40 mm	System footprint: 1364 × 1290 × 1638 ± 50 mm (D × W × H)
Max. board/carrier width: 500 mm	Machine weight: 900 kg
Max. board/carrier length: 650 mm (1 station)	Standards compliance: CE UL
450 mm (2 stations)	Exhaust volume: diameter 200 mm
Min. board edge: 3 mm	volume ≥ 13m ² /minute
Width adjustment drive mode: stepper motor	
Communication signal: SMEMA	

CONTROL SYSTEM

Computer: IPC, LCD monitor, keyboard	V-5000 three-mode spray valve
Operating system: Windows 7	V-420A precise needle valve
Control software: Axxon coating software	V-5400 film coater
CCD resolution: 30W	

STANDARD FEATURES

Industrial computer and software and monitor	Valve type and fixture
X, Y, Z axis and motion platform	Conveyor module / bottom return conveyor
Conveyor auto-width adjustment	Cleaning platform
Ultraviolet and white light	Pressure tank supply module
Safety interlock	Low liquid alarm module
Audible alarm	Circulation heating module
Exhaust port	Pump supply module
Fluid supplying pipe	Laser height detection module
Tube cleaning	Laser fan width adjusting control (V-5400)
CCD camera	Needle calibration module
	Exhaust fan
	Wind speed monitoring module
	Four direction tilting module (for V-420A and V-5000 series valve)
	Electric tilt and rotate module (for V-420A and V-5000 series valve)
	2D barcode reader module

MYCRONIC

SWEDEN
 Mycronic AB
 PO Box 3141
 Nytorpsvägen 9
 SE-183 03 Täby
 Sweden
 Tel: +46 8 638 52 00

CHINA
 Mycronic Co., Ltd
 Unit 106, E Block
 Lane 168, Da Duhe Road.
 Putuo District, 200062
 Shanghai P.R. China
 Tel: +86 21 3252 3785/86

FRANCE
 Mycronic S.A.S.
 1 rue de Traversière - CS 80045
 94513 Rungis Cedex 1
 France
 Tel: +33 1 41 80 15 80

GERMANY
 Mycronic GmbH
 Biberger Straße 93
 D-82008 Unterhaching bei München
 Germany
 Tel: +49 89 4524248-0

JAPAN
 Mycronic Technologies KK
 Chofu Center Bldg.
 1-18-1 Chofugaoka, Chofu-shi
 Tokyo 182-0021
 Japan
 Tel: +81 42 433 9400

NETHERLANDS
 Mycronic B.V.
 High Tech Campus 10
 5656 AE
 Eindhoven
 Netherlands
 Tel: +31 402 62 06 67

SINGAPORE
 Mycronic Pte., Ltd.
 9 Tagore Lane, #02-08/09
 9@Tagore
 Singapore 787472
 Tel: +65 6281 7997

SOUTH KOREA
 Mycronic Co. Ltd.
 3rd Floor, Jung-San
 Bldg. 1026-8
 Sanbon-Dong, Gunpo-Si
 Gyeonggi-Do, 15808
 South Korea
 Tel: +82 31 387 5111

UK
 Mycronic Ltd.
 Unit 2, Concept Park
 Innovation Close
 Poole, Dorset, BH12 4QT
 UK
 Tel: +44 1202 723 585

USA
 Mycronic Inc.
 320 Newburyport Turnpike
 Rowley, MA 01969
 USA
 Tel: +1 978 948 6919

mycronic.com

Specifications are subject to change without notice.
 Mycronic, MYDATA, MYDATA automation and MY, Mycronic 4.0, MYPro, MY100, MY100DX, MY100SX, MY100LX, MY100e, MY100Hx, MY100Dx, MY100Sx, MY100Lx, MY200, MY200Hx, MY200DX, MY200Sx, MY200Lx, MY200, MY300DX, MY300SX, MY300Lx, MY500, MY600, MY600J, MY600L, MY600J, MY600L, MY700, MY700J, MY700L, MY700J, MY700L and MY5Synergy; Mycronic 4.0, MYSmart, MYCSO, MYDIO, MYDSO, MYTIO, MYTSO, T3, T4, T5 and T6; HYDRA Speedmount, Midas, ISiC, Agilis, Agilis Linear Magazine (ALM), Agilis Linear Magazine Flex (ALM FLEX), Agilis Stack Magazine (ASM), Agilis Tray Magazine (ATM), Mycronic Tray Exchanger (TEX), Mycronic Tape Magazine (TM), Mycronic Tray Wagon Magazine (TWM), Mycronic Dip Unit (DPU), Mycronic SHD Tower, Mycronic Standard Vision System (SVS), Mycronic Dual Vision System (DVS), Mycronic Linescan Vision System (LVS), Mycronic HYDRA Vision System (HVS), Mycronic Assembly Process Management (APM) including, JPSys, TFSys, MYLabel, MYPlan, MYCenter, MYTrace, MYCam, FlowLine and Cad Conversion are registered trademarks or trademarks of Mycronic AB. Mycronic AB is ISO 9001:2015 and ISO 14001:2015 certified.