



Specifications

MYTower™ 6+

February 2021

MYCRONIC

Overview

CAPABILITY

STORAGE SYSTEM FOR SMD REELS	
Reel sizes	4-32 mm (4"/100 mm reels) 4-32 mm (7"/180 mm reels) 4-56 mm (13"/300 mm reels) 4-56 mm (15"/380 mm reels)
Freely configurable and expandable	
Access time	0.08 mm (3 mil)

CAPACITY

MAXIMUM REELS		
TOWER MODEL	REEL SIZE	NUMBER OF REELS
MYTower 5	4 mm/4-7"	812
MYTower 6	4 mm/4-7"	980
MYTower 6+	4 mm/4-7"	980
MYTower 7+	4 mm/4-7"	1,148
MYTower 5x	4 mm/4-7"	2,052
MYTower 6x	4 mm/4-7"	2,468

CASSETTES

CASSETTES AVAILABLE			
REEL WIDTH	4-7" REEL DIAMETER	13" REEL DIAMETER	15" REEL DIAMETER
4 mm	•	•	•
8 mm	•	•	•
12 mm	•	•	•
16 mm	•	•	•
24 mm	•	•	•
32 mm	•	•	•
44 mm		•	•
56 mm		•	•

SOFTWARE

SOFTWARE FUNCTIONS		
	STANDARD MODE	MYCENTER MODE
Component management	•	• ⁽¹⁾
Stock monitoring	•	• ⁽¹⁾
External communication protocol	•	•
User access system	•	•
Traceability	•	•
Job preparation	•	• ⁽¹⁾
Barcoding	•	• ⁽¹⁾
Data import/export function	•	• ⁽¹⁾
Inventory function	•	• ⁽¹⁾
Component allocation	•	

⁽¹⁾ Handled by MYCenter software

ACCESSORY

DRY AIR UNIT FREY FND 3.0 F-DP	
Flow rate, max	(in) 24 m ³ /h, (out) 20 m ³ /h
Flow rate, type	3 m ³ /h
Air supply	Class 4 (ISO 8573-1) or better
Operating pressure	5-10 bar
Power supply	115/230 V, 50/60 hz, 18 W
Dimension (WxDxH)	330 mm x 270 mm x 840 mm (13.0" x 10.6" x 33.1")

DRY AIR UNIT DST DC-20/30 T10/T16	
Weight	32 kg
Power supply	115/230 V, 50/60 hz
Dimension (WxDxH)	435 mm x 243 mm x 663 mm

MYTower 6+

The MYTower 6+ is the same height as the MYTower 6, with the key difference being the ability to store 15" reels in all magazines within the storage system. This model has a maximum capacity of 980 reels whilst giving the customer flexibility to store any size of reel.




CONFIGURATION

STANDARD CONFIGURATION		
REEL SIZE	NUMBER OF REELS	TOTAL
8 mm/4-7"	0	287
8 mm/15"	0	
12 mm/4-7"	0	
12 mm/15"	72	
16 mm/4-7"	0	
16 mm/15"	80	
24 mm/4-7"	0	
24 mm/15"	56	
32 mm/4-7"	0	
32 mm/15"	42	
44 mm/15"	25	
56 mm/15"	12	

MISCELLANEOUS

INSTALLATION REQUIREMENTS	
Weight	360 kg/794 lbs
Power requirements	Single phase AC 300 VA
Voltage	115/230 V, 50/60 hz
Ambient temperature	18-35°C (65-95°F), <95% RH non condensing

DIMENSIONS

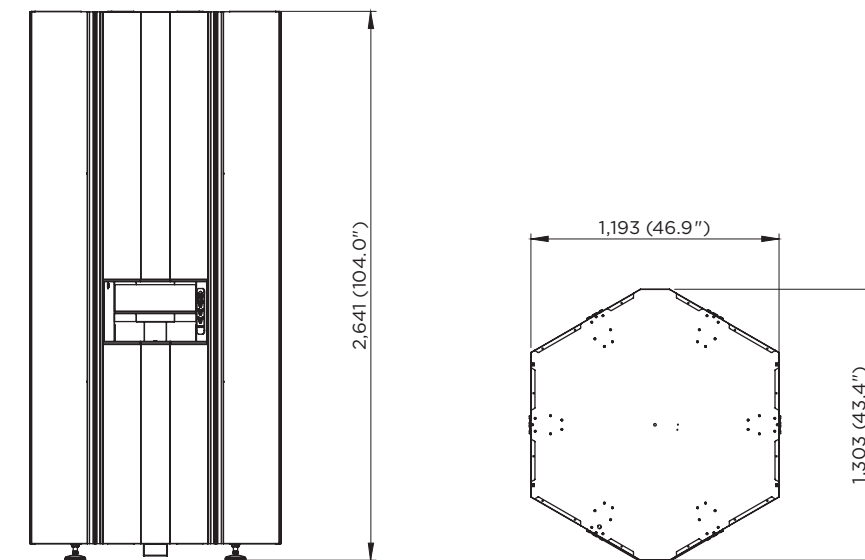

SWEDEN
Mycronic AB
PO Box 3141
Nytorpsvägen 9
SE-183 03 Täby
Sweden
Tel: +46 8 638 52 00

CHINA
Mycronic Co., Ltd
Unit 106, E Block
Lane 168, Da Duhe Road.
Putuo District, 200062
Shanghai P.R. China
Tel: +86 21 3252 3785/86

FRANCE
Mycronic S.A.S.
1 rue de Traversière - CS 80045
94513 Rungis Cedex 1
France
Tel: +33 1 41 80 15 80

Vi TECHNOLOGY
Rue de Rochepleine
38120 Saint Egrève
France
Tel: +33 4 7675 8565

GERMANY
Mycronic GmbH
Biberger Straße 93
D-82008 Unterhaching bei München
Germany
Tel: +49 89 4524248-0

JAPAN
Mycronic Technologies KK
Chofu Center Bldg.
1-18-1 Chofugaoka, Chofu-shi
Tokyo 182-0021
Japan
Tel: +81 42 433 9400

NETHERLANDS
Mycronic B.V.
High Tech Campus 10
5656 AE
Eindhoven
Netherlands
Tel: +31 402 62 06 67

SINGAPORE
Mycronic Pte., Ltd.
9 Tagore Lane, #02-08/09
9@Tagore
Singapore 787472
Tel: +65 6281 7997

SOUTH KOREA
Mycronic Co. Ltd.
3rd Floor, Jung-San
Bldg. 1026-8
Sanbon-Dong, Gunpo-Si
Gyeonggi-Do, 15808
South Korea
Tel: +82 31 387 5111

UK
Mycronic Ltd.
Unit 2, Concept Park
Innovation Close
Poole, Dorset, BH12 4QT
UK
Tel: +44 1202 723 585

USA
Mycronic Inc.
554 Clark Road
Tewksbury, MA 01876
USA
Tel: +1 978 667 9449

mycronic.com